

Highly Versatile Buck-Boost Ambient Energy Manager with Source Voltage Level Configuration

Feature

Ultra-low power start-up

- Cold start from 275 mV input voltage and 3 μ W input power (typical)

Constant input voltage regulation

- Optimized for intermittent and pulse power
- Selectable operating input voltage from 140 mV to 4.5 V

Adaptive and smart energy management

- Switches automatically between boost, buck-boost and buck operation, to maximize energy transfer from its input to the output
- Automatically selects between the source, storage element
- Automatically select the output between the internal supply, the load and the storage element

Load supply voltage


- Current drive capability: 30 mA in low power mode, 60 mA in high power mode
- Selectable load voltage from 1.2 V to 3.3 V

Battery protection features

- Selectable over-charge and over-discharge protection for any type of rechargeable battery or (super-)capacitor
- Fast super-capacitor charging
- Dual cell super-capacitor balancing circuit

Smallest footprint, smallest BOM

- Only four external components are required
- One 10 μ H inductor
- Three capacitors: one 10 μ F, one 15 μ F, one at least 47 μ F

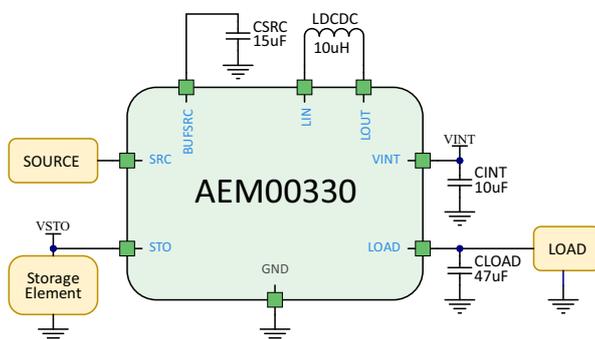

Description

The AEM00330 is an integrated energy management circuit that extracts DC power from an ambient energy harvesting source to simultaneously supply an application and store energy in a storage element. The AEM00330 allows to extend battery lifetime and ultimately eliminates the primary energy storage element in a large range of applications.

Two different storage elements can be connected: one for storing energy and another one for coupling the load output voltage. At start-up, user can choose to charge the storage element first or the load capacitor first.

Thanks to its selectable operating input voltage, it is possible to set a voltage at which the AEM00330 operates. This voltage is between 140 mV and 4.5 V.

With its unique cold start circuit, the AEM00330 can start harvesting with an input voltage as low as 275 mV and from an input power of 3 μ W. The preset protection levels determine the storage element voltages protection thresholds to avoid over-charging and over-discharging the storage element and thus avoiding damaging it. Those are set through configuration pins. Moreover, special modes can be obtained at the expense of a few configuration resistors.

The load voltage can be selected to cover most application needs, with a maximum available load current of 60 mA.

Applications

- Door access systems
- Smart wearable sensors
- Smart switches home/building
- Point-of-sales (POS)

Device Information

Part Number	Package	Body size [mm]
10AEM00330J0000	QFN 40-pin	5x5mm

Evaluation Board

Part Number
2AAEM00330J001

1. Functional Block Diagram

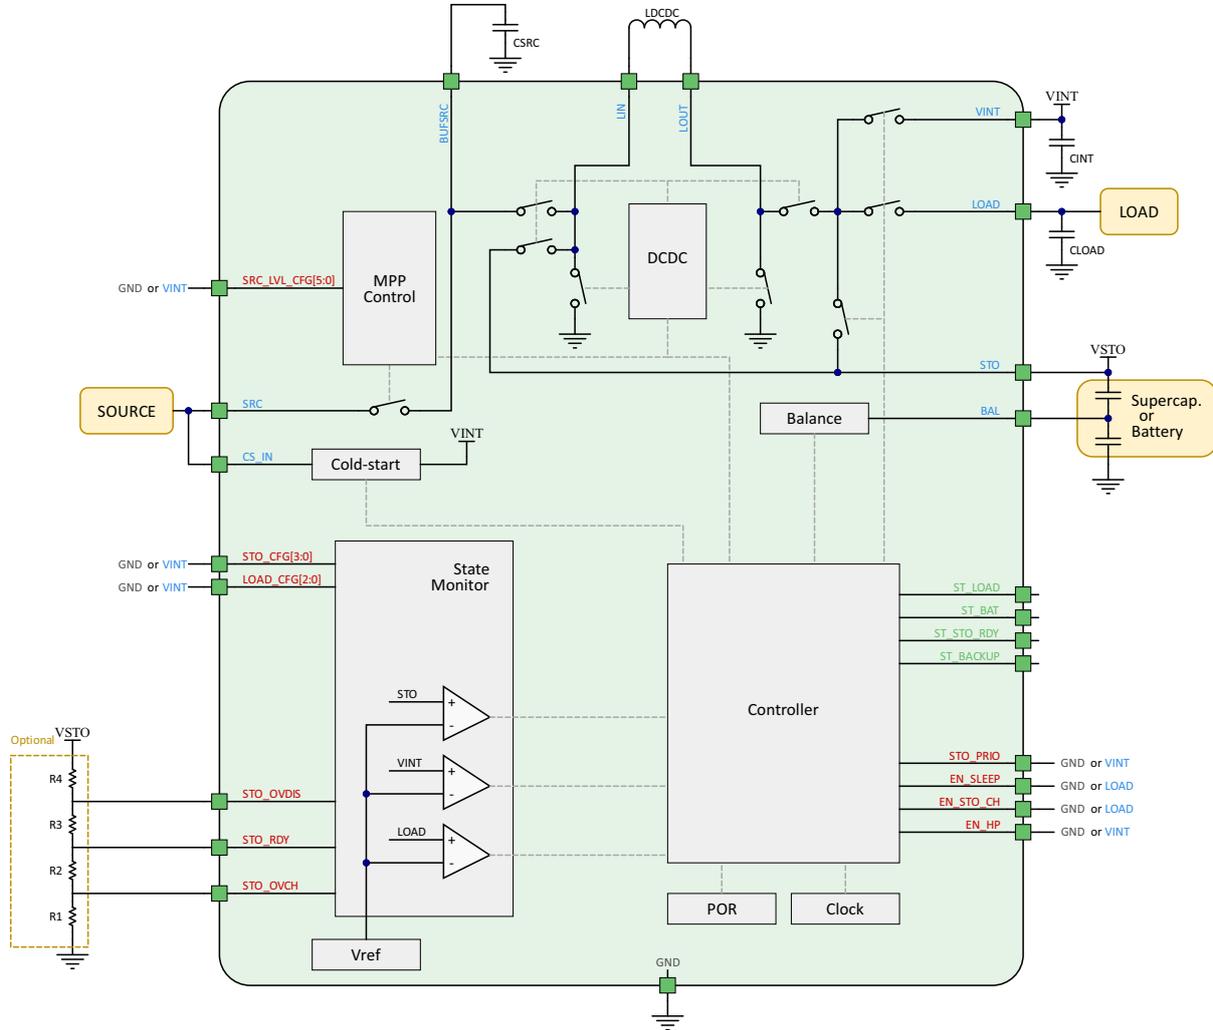


Figure 1: Functional Block Diagram